



BLAZER PRO 128/256



Hikvision Blazer Pro is an all-in-one server that combines Hikvision's powerful video management system (VMS) with video storage capacity in one physical server. Besides of basic functions like recording, live view and playback as well as alarm management, etc., advanced functions such as license plate recognition, POS integration, business intelligence, and mobile surveillance are available to meet your varied requirements.



High Performance and Availability

- Up to 256 channels of access and recording; recording bandwidth up to 640 Mbps
- Support for 2×2 screen joint displays, an economical solution for small monitoring centers
- Automatic network replenishment technology to prevent video data loss when the network is disconnected
- HDD hot swap with RAID 0, RAID 1, RAID 5, RAID 10 to ensure data reliability
- 1+1 power redundancy design to prevent single-power-source failure



High Flexibility and Scalability

- Functions such as business intelligence, mobile surveillance, and license plate recognition to meet your future needs(*)
- Storage expandable with mini-SAS interface for two-level expansion
- Access from anywhere: smart phone, PC, browser, etc.
- More VMS advanced



Easy Deployment

- · Automatic discovery of online network cameras for adding the cameras
- Hikvision VMS software and Windows 8.1 pre-installed
- · Active directory integration for user management




Three-Year Warranty and Software Support Program (SSP)

- Three-year hardware warranty
- Three-year warranty for system with SSP

*Note: The add-ons are available if you purchase the corresponding license. Please contact our sales team for detailed information.



- Intuitive user interface to help you realize easy operation.
- Multiple accesses via PC, smart phone and web browser.

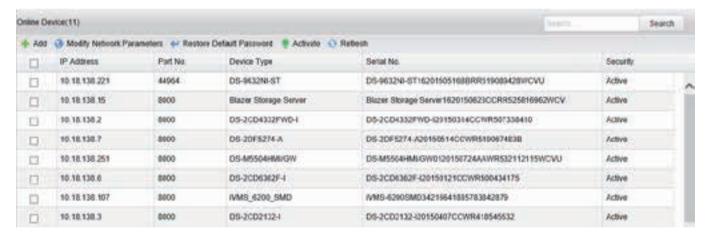

Automatic detection of online cameras for adding cameras to the system




Flexible GIS map and E-map support(*.png / *.jpg / *.bmp / *.svg); allow users to add camera icons on the map to provide a convenient, efficient way for live viewing and instant alarm notification



LPR module and Entrance & Exit management module help you realize efficient vehicle entrance management and keep a real-time record of vehicle entry and exit



BLAZER PRO TYPICAL SOLUTION TOPOLOGY

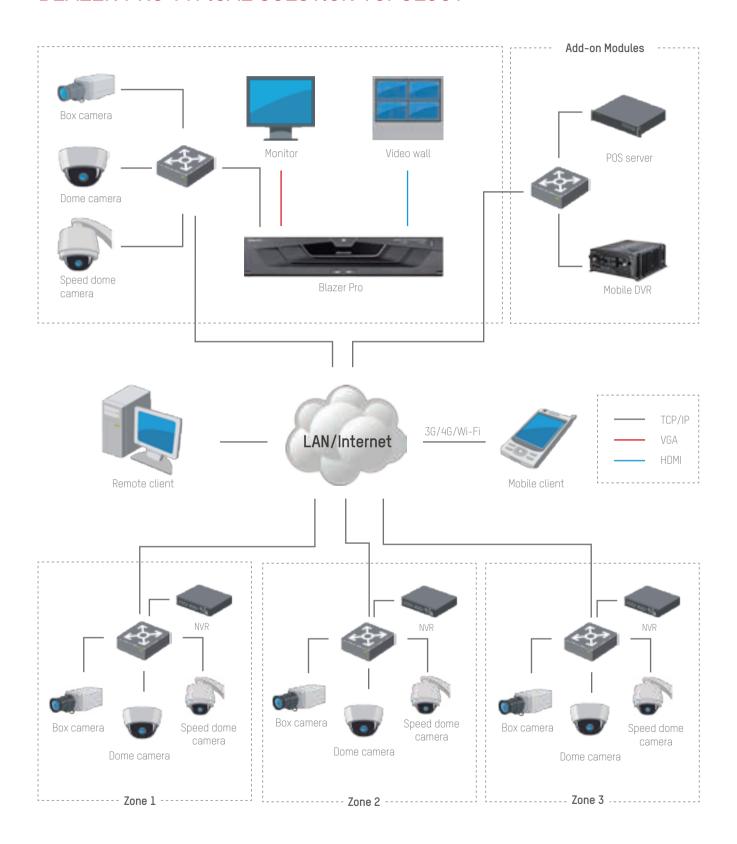

SPECIFICATIONS

	Blazer Pro/256	Blazer Pro/128		
Video Management System				
Number of Connected Cameras per	256 (expandable to 512)	128 (expandable to 256)		
System Number of Connected Devices or Mobile Video Recorders (Sold Separately) per System	256	128		
Number of Connected Mobile Terminals (Sold Separately)	04	64		
Number of Connected Alarm Inputs per System	1024	1024		
Number of Connected Alarm Outputs per System	1024	1024		
Control Clients per System	16	16		
Web Clients per System	16	16		
Mobile Clients per System	64	64		
Web Managers per System	Unlimited	Unlimited		
Number of Users	Unlimited	Unlimited		
Number of Roles	64	64		
PTZ Control Permission Levels	100	100		
Number of Stream Media Servers Per System	16	16		
POS Systems Access (Sold Separately)	100	100		
Video Input Bandwidth per SMS	200 × 2 Mbps	200 × 2 Mbps		
Video Output Bandwidth per SMS	200 × 2 Mbps	200 × 2 Mbps		
SATA	1 SATA interface for 1 HDD (for data storage)	1 SATA interface for 1 HDD (for data storage)		
Video Storage Device				
Incoming Bandwidth	640 Mbps or 320 Mbps (when RAID is enabled)	400 Mbps or 320 Mbps (when RAID is enabled)		
Outgoing Bandwidth	640 Mbps or 320 Mbps (when RAID is enabled)	400 Mbps or 320 Mbps (when RAID is enabled)		
Live View / Playback Resolution	6 MP/5 MP/3 MP /1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/QCIF	6 MP/5 MP/3 MP /1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
Recording Channels	256 channels	128 channels		
SATA	7 SATA interfaces for 7 HDDs (for the video storage)	7 SATA interfaces for 7 HDDs (for the video storage)		
miniSAS	1 miniSAS interface	1 miniSAS interface		
Capacity	Up to 6 TB capacity for each HDD	Up to 6 TB capacity for each HDD		
Array Type	RAID O, RAID 1, RAID 5, RAID 10	RAID 0, RAID 1, RAID 5, RAID 10		
Power Supply	100 to 240 VAC, 6.3 A, 50 to 60 Hz	100 to 240 VAC, 6.3 A, 50 to 60 Hz		
Consumption (without Hard Disk)	≤250 W	≤250 W		
Working Temperature	0° C to +40° C (32° F to 104° F)	0° C to +40° C (32° F to 104° F)		
Working Humidity	10% to 90%	10% to 90%		
Chassis	19-inch rack-mounted 2U chassis	19-inch rack-mounted 2U chassis		
Dimensions (W × D × H)	442 mm × 550 mm × 93 mm (17.4" × 21.7" × 3.7")	442 mm × 550 mm × 93 mm (17.4" × 21.7" × 3.7")		
Weight (without Hard Disk)	≤13.6 kg (29.98 lb)	≤13.6 kg (29.98 lb)		



BLAZER PRO ALL-IN-ONE SERVER

Distributed by

HIKVISION

Heedquarters No.555 Dianmo Road, Binjiang District, Hangzhou 310061, China T+86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sq@hikvision.com

Hikvision Europe T +31-23-5542770 saleseuro@hikvision.com

Hikvision France T +33(0)1-85-330-949 into.fr@hikvision.com

Hikvision Oceania T+61-2-8599-4233 salesau@hikvision.com Hikvision Middle East T+971-4-8816086 salesme@hlkvision.com

Hikvision Spain T+34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com

Hikvision Canada T+1-909-895-0400 sales.usa@hikvision.com Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com